

Work Order ID 161885

Tuesday, May 23, 2017 11:00:12 AM

161885

Page 1

Item ID: D3671-1 Accept ***N900040100*** Setup Start ***NS1***
 Revision ID: Stop ***NS2***
 Item Name: Placard
 Start Date: 5/24/2017 Start Qty: 6.00 ***6*** Cust Item ID:
 Required Date: 5/31/2017 Req'd Qty: 6.00 ***6*** Customer:

Reference:  **MAY 23 2017**
 Approvals: Process Plan: _____ Date: _____ Tooling: _____ Date: _____ Run Start ***NR1***
 QC: _____ Date: _____ SPC (Y/N): _____ Date: _____ Stop ***NR2***

Sequence ID/ Work Center ID	Operation Description	Set Up/ Run Hours	Tool ID	Tool #	Plan Code	Accept Qty	Reject Qty	Reject Number	Insp. Stamp
--------------------------------	--------------------------	----------------------	---------	--------	--------------	---------------	---------------	------------------	----------------

Draw Nbr	Revision Nbr
D3671	Rev A

100	PURCHASING	0.00							DAS 13 9-89
-----	------------	------	--	--	--	--	--	--	-------------------

100
 Purchasing
 Purchasing
 Memo
 Issue P/O: 36472 Make as per Dwg D3671 Red letters (0.100" height) on white adhesive back Possible Manufacture: From 3M 7 mil masking film # 8522CP or Avery IPM # 2031 Possible Supplier: Studio Lettrage Material release note is required

6 MAY 29 2017

110	Receive & Inspect for Damage & Mat'l Certs	0.00							
-----	--	------	--	--	--	--	--	--	--

110
 Packaging
 Packaging
 Memo
 Ensure Material Release Note is attached

6 2017-6-9

120	QC6- All purchased or subcontracted products	0.00							DAS 38 9-89
-----	--	------	--	--	--	--	--	--	-------------------

120
 QC
 Quality Control
 Memo

6 JUN 13 2017

DQA: _____ Date: _____



WORK ORDER NON-CONFORMANCE / UPDATE

QA Closed: _____ Date: _____

Work Order update only ☐

Work Order: _____ Part No. _____ NCR No. _____		DISPOSITION Rework ☐ Scrap ☐ Use-as-is ☐ Suspected Unapproved ☐		AGAINST DEPARTMENT/PROCESS Skid-tube ☐ Machining ☐ Thermoforming ☐ Large Fab ☐ Cross tube ☐ Small Fab ☐ Finishing ☐ Composite ☐ Water Jet ☐ Prod. Eng. Coord. ☐ Rec/Store/Packaging ☐ Supplier ☐ Engineering ☐ Quality ☐ Other ☐					
Date :		Step #:		QTY Effective :			MRB (QSI042) Approval		
Description Work Order Deviation				Disposition				Completed By Lead hand / Supervisor Approval Verification QC / QA Coordinator Approval	
Root Cause		FAULT CATEGORY							
Environment ☐	☐	No Re-verification ☐	Pressure/Forced ☐	Temperature/Cure ☐	Power Loss/Surge ☐	Positioned Wrong ☐			
Design ☐	☐	Operator ☐	Bending ☐	Set-up ☐	Folio/Program ☐	Outside Dimensions ☐			
Doc/Data ☐	☐	Offset/Setup ☐	Centre Not Concentric ☐	BOM/Route ☐	Grain ☐	Over/Under tolerance ☐			
Equip/Tooling ☐	☐	Supplier ☐	Cracks ☐	Broken/Damage/Defect ☐	Weld ☐	Part Incorrect ☐			
Handling/Pre ☐	☐	Training ☐	Crimp/Kink/Ripple/Wave ☐	Inspection Incomplete/Unqualified ☐	Wrong Stock Pulled ☐	Part Lost/Missing ☐			
Material ☐	☐	Use for Testing ☐	Cuffs ☐	Contamination ☐	Out of Sequence ☐	Part Moved ☐			
Internal Transport ☐	☐	Poor Information ☐	Crushing ☐	Countersink ☐	Off-set ☐	Drawing ☐			
Tribal Knowledge ☐	☐	Rushing ☐	Heat Treat ☐	Cut Too Short ☐	Mislabeled ☐	Finish ☐			
LOA ☐	☐	Product Improvement ☐	Wave/Twist in Tube ☐	Instructions Incomplete/Unclear ☐	Fit/Function ☐	Misread ☐			
Substation ☐	☐	Process Improvement ☐	Marks/Chatter ☐	Drill Holes ☐	Misaligned/off center ☐	Turning Sequence ☐			
Past Expiry Date ☐	☐	Manufacturing Process ☐	OTHER : ☐						
Misidentified ☐	☐	Past Due ☐							

Work Order ID 161885

Tuesday, May 23, 2017 11:00:12 AM

161885

Page 2

Item ID: D3671-1 Accept ***N900040100*** Setup Start ***NS1***
 Revision ID: Stop ***NS2***
 Item Name: Placard
 Start Date: 5/24/2017 Start Qty: 6.00 ***6*** Cust Item ID:
 Required Date: 5/31/2017 Req'd Qty: 6.00 ***6*** Customer:
 Reference:

Approvals: Process Plan: _____ Date: _____ Tooling: _____ Date: _____ Run Start ***NR1***
 QC: _____ Date: _____ SPC (Y/N): _____ Date: _____ Stop ***NR2***

Sequence ID/ Work Center ID	Operation Description	Set Up/ Run Hours	Tool ID	Tool #	Plan Code	Accept Qty	Reject Qty	Reject Number	Insp. Stamp
130	Identify as per dwg & Stock Location: _____	0.00							
130									
Packaging	Memo	0.06					DAS 6	JUN 15 2017	
Packaging	***ONE YEAR EXPIRED DATE FROM RECEIVING: JUN 09 2018*** LOCATION: GA						9-89		
140	QC21- Final Inspection - Work Order Release	0.00							
140									
QC	Memo	0.60							
Quality Control									

176/19 98

DAS
21
9-89
JUN 15 2017

DQA: _____ Date: _____



WORK ORDER NON-CONFORMANCE / UPDATE

QA Closed: _____ Date: _____

Work Order update only ☐

Work Order: _____ Part No. _____ NCR No. _____	DISPOSITION Rework ☐ Scrap ☐ Use-as-is ☐ Suspected Unapproved ☐	AGAINST DEPARTMENT/PROCESS Skid-tube ☐ Machining ☐ Thermoforming ☐ Large Fab ☐ Cross tube ☐ Small Fab ☐ Finishing ☐ Composite ☐ Water Jet ☐ Prod. Eng. Coord. ☐ Rec/Store/Packaging ☐ Supplier ☐ Engineering ☐ Quality ☐ Other ☐			
Date :	Step #:	QTY Effective :		MRB (QSI042) Approval	
Description Work Order Deviation		Disposition		Completed By	
				Lead hand / Supervisor Approval Verification	
				QC / QA Coordinator Approval	
Root Cause Environment ☐ Design ☐ Doc/Data ☐ Equip/Tooling ☐ Handling/Pre ☐ Material ☐ Internal Transport ☐ Tribal Knowledge ☐ LOA ☐ Substation ☐ Past Expiry Date ☐ Misidentified ☐ No Re-verification ☐ Operator ☐ Offset/Setup ☐ Supplier ☐ Training ☐ Use for Testing ☐ Poor Information ☐ Rushing ☐ Product Improvement ☐ Process Improvement ☐ Manufacturing Process ☐ Past Due ☐		FAULT CATEGORY Pressure/Forced ☐ Bending ☐ Centre Not Concentric ☐ Cracks ☐ Crimp/Kink/Ripple/Wave ☐ Cuffs ☐ Crushing ☐ Heat Treat ☐ Wave/Twist in Tube ☐ Marks/Chatter ☐ Temperature/Cure ☐ Set-up ☐ BOM/Route ☐ Broken/Damage/Defect ☐ Inspection Incomplete/Unqualified ☐ Contamination ☐ Countersink ☐ Cut Too Short ☐ Instructions Incomplete/Unclear ☐ Drill Holes ☐ Power Loss/Surge ☐ Folio/Program ☐ Grain ☐ Weld ☐ Wrong Stock Pulled ☐ Out of Sequence ☐ Off-set ☐ Misabeled ☐ Fit/Function ☐ Misaligned/off center ☐ Positioned Wrong ☐ Outside Dimensions ☐ Over/Under tolerance ☐ Part Incorrect ☐ Part Lost/Missing ☐ Part Moved ☐ Drawing ☐ Finish ☐ Misread ☐ Turning Sequence ☐			
☐ OTHER : _____					

Picklist Print

Tuesday, May 23, 2017 11:00:11 AM

Page 1

Work Order ID: 161885

161885

Parent Item: D3671-1

D3671-1

Parent Item Name: Placard

Start Date: 5/24/2017

Required Date: 5/31/2017

Start Qty: 6.00

Required Qty: 6.00


Comments: IPP: A07.11.12 ecn 1019 New issue EC verified by:DD

Component Item ID/ Item Name	Replacement Item ID	Mfg/ Purch	Bin Item	Primary Location	Last Location	Route Seq ID	Unit of Measure	Qty on Hand	Qty per Kit	Total Qty	Qty Issued	Date Issued	Status
D3671-1P *D3671-1P* Placard		Purchased	No			100	Each	0.0000	1	6			
										**	6x501710-9.		

SHOP COPY
 RETURN TO
 ENGINEERING
 UNCONTROLLED
 SUBJECT TO AMEND
 WITHOUT NOTICE
 WORK ORDER
 NO. 161585 *AZ*

MAY 23 2017

FONT: ARIAL
 COLOUR: RED
 HEIGHT: 0.10
 WIDTH: 1.8
 (2 PLACES)

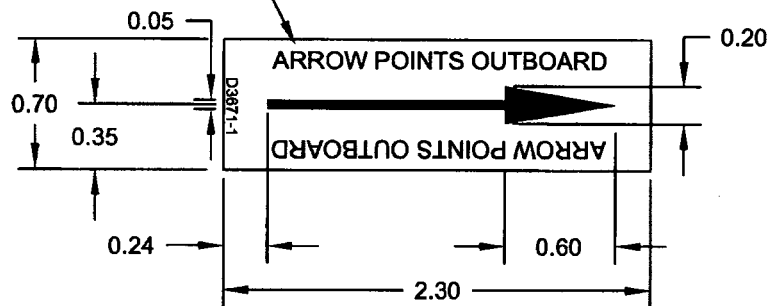

D3671-1 PLACARD

NOTES:

- 1) MATERIAL: RED ARROW ON WHITE ADHESIVE BACK VINYL
 MANUFACTURED FROM 3M 7 MIL MASKING FILM #8522CP
 OR AVERY IPM #2031. SIZE IS 2.30" LONG x 0.70" WIDE
- 2) FINISH: NONE
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: NONE
- 7) WEIGHT: N/A

RELEASED
 07.11.06 *W*

A	NEW ISSUE	DC	07.08.27
REV.	DESCRIPTION	BY	DATE
DESIGN	<i>DC</i>	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	<i>DC</i>		
CHECKED	<i>DC</i>	DRAWING NO.	REV. A
MFG. APPR.	<i>DC</i>	D3671	SHEET 1 OF 1
APPROVED	<i>DC</i>	TITLE	SCALE
DE APPR.	<i>DC</i>	PLACARD	1:1
DATE	07.08.27	COPYRIGHT © 2007 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	

studio sl2

210 Main West
Hawkesbury, Ontario K6A 2H6
Canada

INVOICE

Invoice No.: 44429
Date: 06/09/2017
Ship Date:
Page: 1
Re: Order No.

Sold to:

Dart Aerospace Ltd

1270 Aberdeen
Hawkesbury, Ontario
K6A 1K7

Ship to:

Dart Aerospace Ltd

1270 Aberdeen
Hawkesbury, Ontario
K6A 1K7

Quantity	Description	Base Price	Disc. %	Unit Price	Amount
6	D3671-1P	✓ 13.33		✓ 13.33	✓ 79.98
6	D4917-315P	13.33		13.33	79.98
25	D5409-1P	6.67		6.67	166.75
25	D5409-3P	6.67		6.67	166.75
	PO# 36472				
	Attn: Chantal				
	Subtotal:				493.46
	H - HST				
	HST				64.16

8017-6-9

Thank you for your business / Merci de faire affaire avec nous

Shipped By:	Tracking Number:	HST: 825007651RT0001	Total Amount	557.62
Comment: WO20353			Amount Paid	0.00
Sold By:			Amount Owning	557.62

DA6
38
988

****CERTIFICATE of CONFORMITY****			
Customer: Studio SL2			
Purchase Order N°: 36472	Packing Slip N°: WO 20353	Part N°:	Serial N°:
Description: D3671-1P, D4917-31SP, D5409-1P, D5409-3P.		Quantity: 6, 6, 25, 25.	
Certification: We hereby certify that: 1. The above listed items were manufactured, repaired and/or inspected in accordance with applicable drawings and/or specifications; 2. All work was accomplished in accordance with the Dart Aerospace Purchase Order; 3. Results of all inspections, chemical or physical tests, as well as other evidence, which shows the acceptability of raw materials, parts and/or assembly components are on file and available for inspection at any time.			
Authority: Avery			
APPROVAL: Valerie Young Signature: <i>Val</i> Title: office administrator		DATE: June 09.17	



Avery® IPM™ 2031

issued: 01/04/2005

Introduction

Avery® IPM™ 2031 is a high quality pressure-sensitive vinyl film, designed for use on wide format inkjet printers. Avery® IPM™ 2031 has excellent printing properties, allowing crisp print quality with bright and vibrant colours. Avery® IPM™ 2031 offers rapid ink drying and a water-resistant material. It combines good adhesion during its life and easy removal afterwards.

Description

Facefilm: 80-micron premium white calendered, topcoated vinyl.
 Adhesive: removable, acrylic based
 Backing paper: one side coated kraft paper, 140 g/m²

Features

- Excellent printability
- Vibrant and bright colours
- Crisp print quality
- Spray water resistant wit specific pigmented inks
- Good adhesion, excellent removability
- Warranty on outdoor durability

Recommendations for use

A wide variety of full-colour graphics for indoor - and **short/medium term outdoor** applications such as posters, murals, displays, exhibition stands, vehicle graphics etc. Avery® IPM™ 2031 is suitable for application to a wide variety of substrates and will remove cleanly for up to 1 year after application.

IPM media should be handled with care as any surface contamination may affect the print quality. Media should be processed in an environment of 15-25°C and 30-70% relative humidity. After drying, the finished prints should be wrapped in polyethylene film and despatched flat or rolled with the printed side facing outwards. To protect prints against water, UV/light and abrasion, overlamination with a clear film is recommended. For specific details of Avery® DOL combinations, refer to "Technical Bulletin 5.3. Recommended combinations of Avery® Overlaminates and Avery® Digital Print Media"

Always test your combination of Avery® IPM™ medium, inkjet printer and inks prior to commercial use.

Compatibility

Avery® IPM™ 2031 is compatible with a broad selection of inkjet printers, when printing with pigmented, water based inks. For specific details refer to "Technical Bulletin 5.6 Avery Dennison Inkjet Print Media - Printer compatibility".

Durability:

Avery® IPM™ 2031 is warranted for outdoor use in conjunction with pigmented outdoor inks from HP, Encad and Colorspan. The warranted period varies from type of application and type of overlaminate from 18 months up to 5 years. For full details, see our Avery® IPM™ Outdoor warranty.



Physical properties

Features	Test method ¹	Results
Caliper, facefilm	ISO 534	80 µm
Gloss	ISO 2813, 20°	1%
Dimensional stability	DIN 30646	0.3 mm. max
Adhesion, initial	FINAT FTM-1, stainless steel	180 N/m
Adhesion, ultimate	FINAT FTM-1, stainless steel	260 N/m
Flammability		Self extinguishing
Accelerating ageing	DIN 53587, 500h exposure	No negative impact on film Performance
Shelf life	Stored at 22° C/50-55 % RH	2 years
Removability		up to 1 year
Not when applied to: Nitro-cellulose paints, ABS, Polystyrene, certain types of PVC		
Durability ²	Overlaminated with DOL 4300	5 years
	Overlaminated with DOL 1000, DOL 1100 with overlaps	3 years
	Overlaminated without overlaps for static applications only	2 years
	Without overlaminate and used for static, Non-abrasive application ONLY	18 months

Only when printed with ENCAD GO, HP and Colorspan pigmented inks and when properly applied in accordance with our application instructions. Only applicable for vertical exposure.

Temperature range

Features	Results
Application temperature	Minimum: +10°C
Service temperature	-20°C to +80°C

Important

Information on physical and chemical characteristics is based upon tests we believe to be reliable. The values listed herein are typical values and are not for use in specifications. They are intended only as a source of information and are given without guarantee and do not constitute a warranty. Purchasers should independently determine, prior to use, the suitability of this material to their specific use. All technical data are subject to change. In case of any ambiguities or differences between the English and foreign versions of these Conditions, the English version shall be controlling.

Warranty

Avery® branded materials are manufactured under careful quality control and are warranted to be free from defect in material and workmanship. Any material shown to our satisfaction to be defective at the time of sale will be replaced without charge. Our aggregate liability to the purchaser shall in no circumstances exceed the cost of the defective materials supplied. No salesman, representative or agent is authorised to give any guarantee, warranty, or make any representation contrary to the foregoing.

All Avery® branded materials are sold subject to the above conditions, being part of our standard conditions of sale, a copy of which is available on request.

1) Test methods

More information about our test methods can be found on our website.

2) Durability

The durability is based on middle European exposure conditions. Actual performance life will depend on substrate preparation, exposure conditions and maintenance of the marking. For instance, in the case of signs facing south; in areas of long high temperature exposure such as southern European countries; in industrially polluted areas or high altitudes, exterior performance will be decreased.

